

# Gap Pad® 3004SF

High Performance, Thermally Conductive Material With Silicone-Free Formulation

## Features and Benefits


- Thermal Conductivity: 3.0 W/m-K
- Excellent thermal performance
- Silicone-free formulation
- 0.25 mil PET provides easy disassembly, leaving no residue
- Tacky side allows for ease of handling and placement



Gap Pad® 3004SF is high performance, 3.0 W/m-K, thermally conductive gap filling material. Gap Pad® 3004SF is silicone-free by design and offers exceptionally low interfacial resistances to adjacent surfaces.

Gap Pad® 3004SF is designed for applications that are silicone-sensitive.

Gap Pad® 3004SF is constructed using a 0.25 mil PET film that provides a no tack surface on one side and natural tack on the other side.

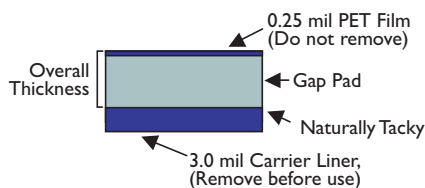

## TYPICAL PROPERTIES OF GAP PAD 3004SF

PROPERTY	IMPERIAL VALUE	METRIC VALUE	TEST METHOD
Color	Light Gray	Light Gray	Visual
Reinforcement Carrier	0.25 mil PET	0.25 mil PET	—
Thickness (inch) / (mm)	0.010 to 0.125	0.254 to 3.175	ASTM D374
Inherent Surface Tack	I	I	—
Density (Bulk Rubber) (g/cc)	3.2	3.2	ASTM D792
Heat Capacity (J/g-K)	0.8	0.8	ASTM E1269
Hardness (Bulk Rubber) (Shore 00) (I)	70	70	ASTM D2240
Continuous Use Temp (°F) / (°C)	-40 to 257	-40 to 125	—
<b>ELECTRICAL</b>			
Dielectric Breakdown Voltage (Vac)	>6000	>6000	ASTM D149
Dielectric Constant (1000 Hz)	8.0	8.0	ASTM D150
Volume Resistivity (Ohm-meter)	10 <sup>11</sup>	10 <sup>11</sup>	ASTM D257
Flame Rating	V-O	V-O	U.L. 94
<b>THERMAL</b>			
Thermal Conductivity (W/m-K) (2)	3.0	3.0	ASTM D5470
1) Thirty second delay value at 250 mil, 23°C.			
2) This is the measured thermal conductivity of the Gap Pad compound.			


## Typical Applications Include:

- Hard disk drives
- Automotive electronics
- Optical components
- HDD case to tray
- Medical devices
- LED lighting
- HDD/SSD combination drives
- Solar energy
- Laser optics

## Configurations Available:

- Sheet form and die-cut parts
- Custom thicknesses available upon request

## Building a Part Number

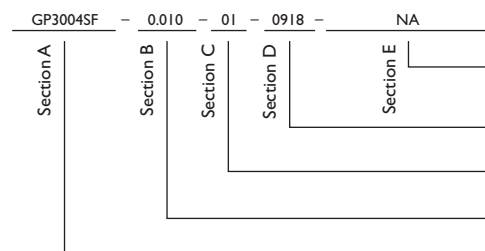

## Standard Options

◀ example

NA = Selected standard option. If not selecting a standard option, insert company name, drawing number, and revision level.

0918 = Standard sheet size 9" x 18", or  
00 = custom configuration

01 = Natural tack, one side

Standard thicknesses available: 0.010", 0.016", 0.023",  
0.030", 0.040", 0.060", 0.080", 0.100", 0.125"

GP3004SF = Gap Pad 3004SF Material

Note: To build a part number, visit our website at [www.bergquistcompany.com](http://www.bergquistcompany.com).



[www.bergquistcompany.com](http://www.bergquistcompany.com)

The Bergquist Company -  
North American Headquarters  
18930 West 78th Street  
Chanhassen, MN 55317  
Phone: 800-347-4572  
Fax: 952-835-0430

The Bergquist Company -  
European Headquarters  
Netherlands  
Phone: 31-35-5380684  
Fax: 31-35-5380295

The Bergquist Company -  
Asia Headquarters  
Hong Kong  
Ph: 852-2690-9296  
Fax: 852-2690-3408

All statements, technical information and recommendations herein are based on tests we believe to be reliable, and THE FOLLOWING IS MADE IN LIEU OF ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MARKETABILITY AND FITNESS FOR PURPOSE. Sellers' and manufacturers' only obligation shall be to replace such quantity of the product proved to be defective. Before using, user shall determine the suitability of the product for its intended use, and the user assumes all risks and liability whatsoever in connection therewith. NEITHER SELLER NOR MANUFACTURER SHALL BE LIABLE EITHER IN TORT OR IN CONTRACT FOR ANY LOSS OR DAMAGE, DIRECT, INCIDENTAL, OR CONSEQUENTIAL, INCLUDING LOSS OF PROFITS OR REVENUE ARISING OUT OF THE USE OR THE INABILITY TO USE A PRODUCT. No statement, purchase order or recommendations by seller or purchaser not contained herein shall have any force or effect unless in an agreement signed by the officers of the seller and manufacturer.

PDS\_GP\_3004SF\_0215